



KING STEEL FIRE-PROOF SAFE

คิงสตีล ตู้เซฟนิรภัย

MODEL GS-160S | MODEL GS-160



GUN SAFE

w / dial lock

MODEL GS-160S | MODEL GS-160

MODEL	GS-160S
WEIGHT	APPROX. 71 KG
EXTERIOR	H1,600xW400xD400 mm
INTERIOR	H1,595xW395xD320 mm
FITTINGS	1 SHELF
	1 LOCKABLE COMPARTMENT

MODEL	GS-160
WEIGHT	APPROX. 100 KG
EXTERIOR	H1,600xW600xD430 mm
INTERIOR	H1,595xW595xD320 mm
FITTINGS	1 SHELF
	1 LOCKABLE COMPARTMENT

MODEL CS-120 | MODEL CS-140 | MODEL CS-160

CABINET SAFE

w / dial lock



MODEL CS-120 | MODEL CS-140 | MODEL CS-160

MODEL	CS-120
WEIGHT	APPROX. 65 KG
EXTERIOR	H1,235xW500xD480 mm
INTERIOR	H1,195xW485xD380 mm
FITTINGS	2 REMOVABLE SHELVES
	1 LOCKABLE COMPARTMENT

MODEL	CS-140
WEIGHT	APPROX. 73 KG
EXTERIOR	H1,435xW500xD480 mm
INTERIOR	H1,395xW485xD380 mm
FITTINGS	2 REMOVABLE SHELVES
	1 LOCKABLE COMPARTMENT

MODEL	CS-160
WEIGHT	APPROX. 82 KG
EXTERIOR	H1,635xW500xD480 mm
INTERIOR	H1,595xW485xD380 mm
FITTINGS	3 REMOVABLE SHELVES
	1 LOCKABLE COMPARTMENT

FIRE & DROP TEST



The safe is prepared for fire-proof test.




The safe is under heating at the temp. of 1,010 °c for 2 hours.



Papers inside the safe are still in perfect condition from fire exposure.



The safe is hoisted up to 4 m. above the concrete floor and then dropped.

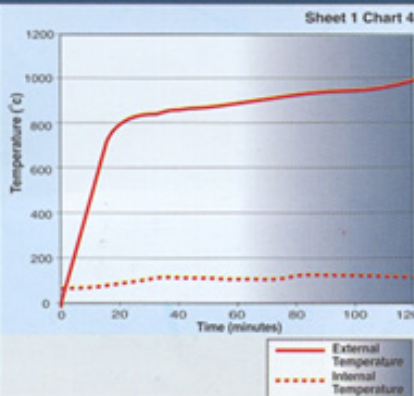

GUN SAFE w / dial lock

CABINET SAFE w / dial lock